

Magnetic drive pumps

MXM series

NEW



Patent
JAPAN / U.S.A. / TAIWAN

Pat.Pend.
EU / KOREA / CHINA





Magnetic drive pumps with an excellent balance of features and performance

The MXM series of pumps have now been added to the lineup of Iwaki's magnetic drive process pumps, which have earned high acclaim and the trust of users all around the world. The new MXM series feature an excellent balance of the characteristics required of chemical pumps, including corrosion resistance, durability and safety. They employ a non-contact, self-radiating bearing structure to better withstand difficult operating conditions. The advent of the MXM series has further expanded the array of choices offered by Iwaki's process magnetic drive pumps.

Better withstanding difficult operating conditions

The proven non-contact system and self-radiating bearing structure deliver substantial improvements in tolerance of dry running and poor suction conditions


Non contact system

Unlike conventional magnetic drive pumps, the MXM series are designed to prevent contact between the bearing and the rear thrust faces, even during dry running or air ingress into the suction. By preventing contact, the rear thrust ring minimizes heat generation to prevent melting of plastic parts.

Self radiation structure (PAT.PEND.)

(International patent applied)

Through heat-dispersion holes provided in the fixed portions of the impeller and the magnet capsule, the liquid around the spindle and the bearing is forced to circulate so that heat generated by sliding can be reduced effectively. Thus, thermal deformation and melt are prevented.

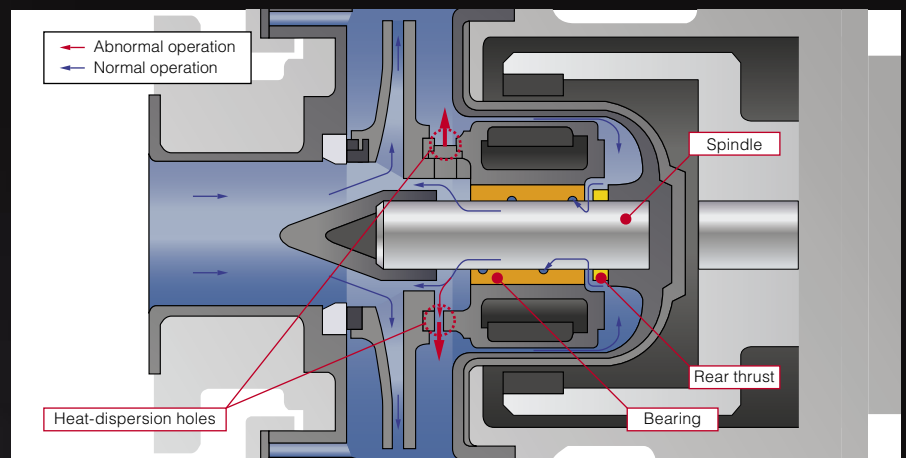

MXM545

MXM542

Significantly improved safety and durability



Exceptional corrosion resistance

The MXM series employ optimum anti-corrosive materials such as carbon fiber reinforced ETFE (CFRETFE), fine ceramic and carbon for parts that come in contact with liquid. The most suitable impeller size and motor output can be selected for the required liquid property.



Impeller+Magnet capsule



Spindle+ Bearing

Robust structure

The pumps have an external armour of high strength ductile cast iron for use in heavy duty chemical process applications.



Cover+Front casing


Enhanced safety

The MXM features a unique rear casing shape designed to prevent stress concentration. This increases both the pump's pressure resistance and the mechanical strength of the spindle support. The MXM uses a dual structure incorporating an FRP rear casing cover. In addition to further increasing the pump's pressure resistance, it improves safety with dual containment preventing liquid leakage in the event of unexpected damage to the rear casing.



Rear casing+Rear casing cover

Construction and materials

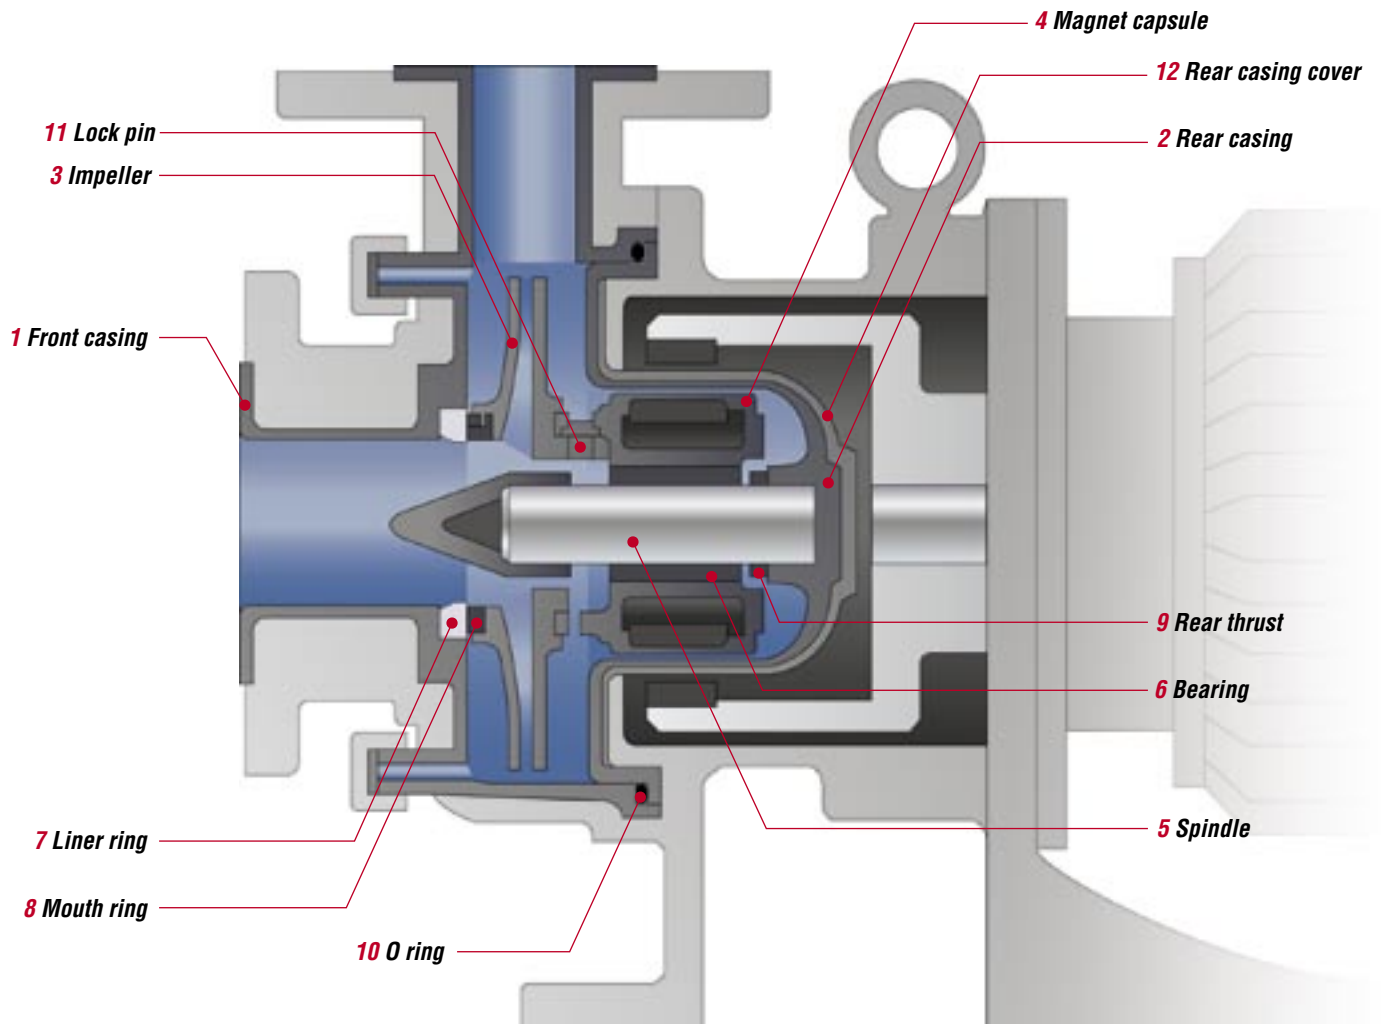

Wet-end materials

Part	Material code	CF	FF	KK
1 Front casing		CFRETFE		
2 Rear casing				
3 Impeller				
4 Magnet capsule				
5 Spindle		High-purity alumina ceramic	High-purity alumina ceramic	SiC
6 Bearing		High-density carbon		
7 Liner ring		High-purity alumina ceramic		
8 Mouth ring		PTFE with filler		
9 Rear thrust		CFRPFA		
10 O ring		FKM/EPDM/AFLAS®/Dai-el perfluoro®		
11 Lock pin		CFRETFE		
12 Rear casing cover		FRP		

Pump identification

MXM 54 2 - 150 1 E CF V I - H												
		1	2	3	4	5	6	7	8	9	10	
1	Series symbol	MXM				7	Material of Bearing / Spindle		CF: High density carbon / High purity alumina ceramic FF: High purity alumina ceramic / High purity alumina ceramic KK: SiC/SiC			
2	Pump size (Suction X Discharge)	54: 50mm × 40mm				8	Material of O ring		V: FKM E: EPDM A: AFLAS® P: Dai-el perfluoro®			
3	Motor output	2: 1.5kW 3: 2.2kW 5: 4.0kW				9	Standard for pipe connection and motor		J: JIS flange + JIS motor I: ISO flange + IEC motor A: ANSI flange + JIS motor			
4	Impeller size	150, 140, 130, 125, 120, 110				10	Special code		H: With rear casing cover B: With base plate S: Other special order <small>*Special code may overlap.</small>			
5	Impeller range	1, 3, 4										
6	Main material	E: CFRETFE										

Specifications

50Hz

Model	Pump size Suction X Discharge	Impeller size	Capacity L/min	Head m	Motor Output kW
MXM54-1 (Impeller range 1)	50mm X 40mm	150	200	18	1.5/2.2/4.0
		140	200	18.5	
		120	200	14.5	
MXM54-3 (Impeller range 3)		150	300	20.5	
		140	300	19.5	
		130	300	17	
MXM54-4 (Impeller range 4)		150	400	25	
		140	400	20.5	
		125	400	15.5	
		110	400	9.5	

Note1 : Liquid temp. range: -10 to 105 °C (10 to 105 °C when AFLAS® O-ring is used.)

Notes for selection

(1) The performance curves in this catalogue represent the data measured using clear water at 20 °C.

(2) Choose the pump model suited to the liquid gravity.

Make sure that the motor output is at least five to ten percent higher than theoretically required.

Shaft power (Sp) × liquid gravity × the range between 1.05 and 1.1 < Motor output

(Note) The shaft power (Sp) increases in proportion to the liquid gravity.

As the viscosity rises, the shaft power is higher while the head and the discharge are lower.
The power and the performance need to be adjusted.

(3) No magnetic drive pump supports continuous closed running. Be sure to ensure the minimum flow volume.

• Minimum flow volume

Impeller systems 1 and 3: 20 L/min.

Impeller system 4: 50 L/min.




(4) The pressure resistance of the pump is 0.7MPa.

(5) FF material models

• Liquid should be 1cp or more.


• HQ performance is somewhat different from CF/KK models. For detail, please contact with us.

Performance curves

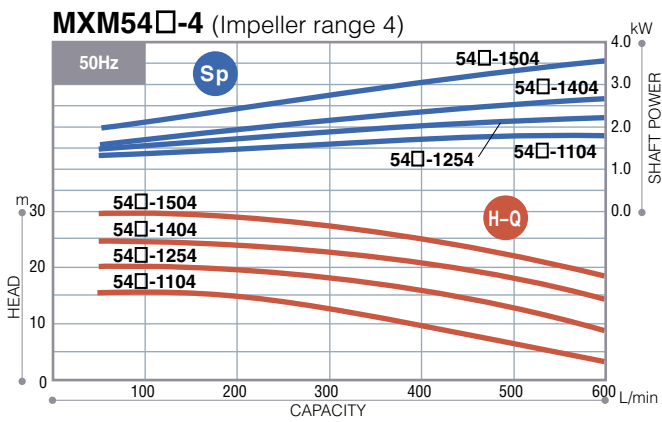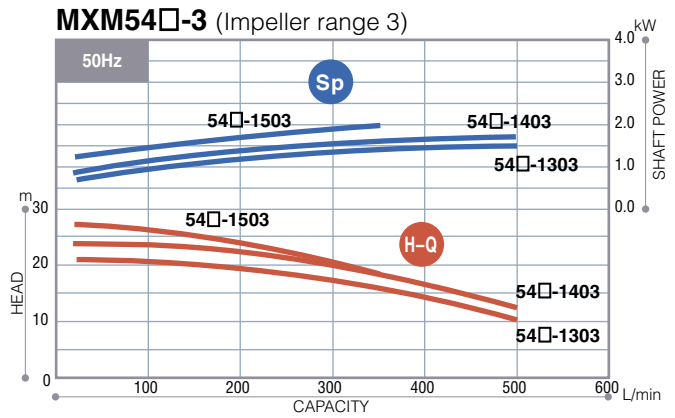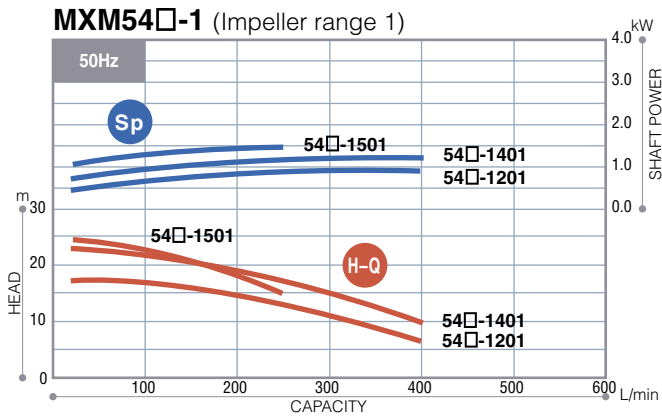


Dimensions in mm

Without base

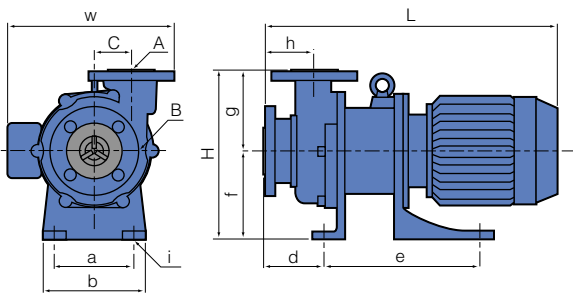

With base

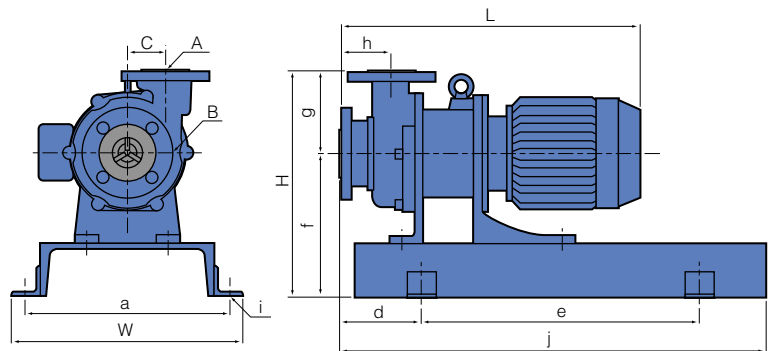

Without base

Model	W	H	L	A	B	a	b	c	d	e	f	g	h	i	Mass kg Less motor
MXM542	294	295	517	40	50	140	180	65	106	275	155	140	87	4-Ø14	25
MXM543			589												30
MXM545	306														

With base

Model	W	H	L	A	B	a	c	d	e	f	g	h	i	j	Mass kg Less motor
MXM542	400	385	517	40	50	350	65	140	480	245	140	87	4-Ø19	735	55
MXM543			589												60
MXM545															

Note: The dimensions may differ with the type of motor installed.

Optional accessories

Iwaki dry running protector DR series

Model DR is electric current sensing type dry running protector. It detects the decreased load current (lower limit) to stop the pump when it runs dry or runs with air sucking in. It can detect over-load, too.

- Current figure to be set is indicated on LCD.
- Both top/bottom figures can be set.
 - Top:Over-load
 - Bottom:Dry running, air sucking-in operation, operation with suction side closed
- Built-in current transformer
- DIN rail mounting
- It is unable to use DR when inverter is employed in the system.



DR-20

Specification

50Hz

Model	DR-20	
Motor power	380 to 440V three phase	
Applied motor	0.75 to 15kW	
Power control	100 to 240V single phase	
Power	V	200 to 240V \pm 10% single phase
	Input	3.5W
Detective current	0.5 to 32.0A	
Current transformer(CT)	Built-in	
Outer dimension	D80 X W153 X H122	

Iwaki process magnetic drive pump series

MDE SERIES

The most reliable, large-sized magnetic drive pump designed for process use



MDE125

Specifications

- Max. discharge capacity: 4.0m³/min
- Max. head: 55m
- Main materials: ETFE, PFA, SiC
- Liquid temp. range: 0 to 100°C

MX/MX-F SERIES

Withstands difficult operating conditions and offers high efficiency




MX-F402

Specifications

- Max. discharge capacity: 500 L/min
- Max. head: 35m
- Main materials: GFRPP, CFRETFE
- Liquid temp. range: 0 to 80°C

MDM SERIES

Magnetic drive process pumps with dry running capability

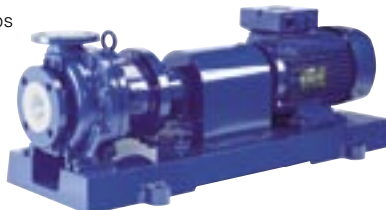

MDM32(PFA type)

Specifications

- Max. discharge capacity: 1.4m³/min
- Max. head: 74m
- Main materials: CFRETFE/PFA
- Liquid temp. range: -20 to 105°C(CFRETFE), -20 to 150°C(PFA)

SMX SERIES

Versatile self-priming magnetic drive pump with enhanced durability under abnormal operation



SMX-441

Specifications

- Max. discharge capacity: 345 L/min
- Max. head: 18m
- Main materials: GFRPP
- Liquid temp. range: 0 to 80°C

www.iwakipumps.jp

IWAKI CO.,LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

EUROPE / U.S.A.

European office: IWAKI Europe GmbH
 Austria : IWAKI (Austria) GmbH
 Belgium : IWAKI Belgium N.V.
 Denmark : IWAKI Nordic A/S
 Finland : IWAKI Suomi Oy
 France : IWAKI France S.A.
 Germany : IWAKI Europe GmbH
 Holland : IWAKI Holland B.V.
 Italy : IWAKI Italia S.R.L.
 Norway : IWAKI Norge AS
 Spain : IWAKI Iberica Pumps, S.A.
 Sweden : IWAKI Sverige AB
 Switzerland : IWAKI (Schweiz) AG
 U.K. : IWAKI Pumps (UK) Ltd.
 U.S.A. : IWAKI America Inc.

TEL: (49)2154 9254 0 FAX: 2154 9254 48
 TEL: (41)26 674 93 00 FAX: 26 674 93 02
 TEL: (32)13 67 02 00 FAX: 13 67 20 30
 TEL: (45)48 24 2345 FAX: 48 24 2346
 TEL: (358)9 2745810 FAX: 9 2742715
 TEL: (33)1 69 63 33 70 FAX: 1 64 49 92 73
 TEL: (49)2154 9254 50 FAX: 2154 9254 55
 TEL: (31)297 241121 FAX: 297 273902
 TEL: (39)02 990 3931 FAX: 02 990 42888
 TEL: (47)66 81 16 60 FAX: 66 81 16 61
 TEL: (34)943 630030 FAX: 943 628799
 TEL: (46)8 511 72900 FAX: 8 511 72922
 TEL: (41)26 674 93 00 FAX: 26 674 93 02
 TEL: (44)1743 231363 FAX: 1743 366507
 TEL: (1)508 429 1440 FAX: 508 429 1386

ASIA / OCEANIA

Australia : IWAKI Pumps Australia Pty Ltd. TEL: (61)2 9899 2411 FAX: 2 9899 2421
 China
 Hong Kong : IWAKI Pumps Co., Ltd. TEL: (852)2607 1168 FAX: 2607 1000
 Shanghai : IWAKI Pumps (Shanghai) Co., Ltd. TEL: (86)21 6272 7502 FAX: 21 6272 6929
 Beijing : IWAKI Pumps Co., Ltd. (Beijing office) TEL: (86)10 6442 7713 FAX: 10 6442 7712
 Guangzhou : GFTZ IWAKI Engineering & Trading Co., Ltd. TEL: (86)20 8435 0603 FAX: 20 8435 9181
 Indonesia : IWAKI Singapore (Indonesia Branch) TEL: (62)21 6906606 FAX: 21 6906612
 Korea : IWAKI Korea Co.,Ltd. TEL: (82)2 3474 0523 FAX: 2 3474 0221
 Malaysia : IWAKI Sdn. Bhd. TEL: (60)3 7803 8807 FAX: 3 7803 4800
 Philippines : IWAKI Chemical Pumps Philippines, Inc. TEL: (63)2 888 0245 FAX: 2 843 3096
 Singapore : IWAKI Singapore Pte Ltd. TEL: (65)6316 2028 FAX: 6316 3221
 Taiwan : IWAKI Pumps Taiwan Co., Ltd. TEL: (886)2 8227 6900 FAX: 2 8227 6818
 Thailand : IWAKI (Thailand) Co.,Ltd. TEL: (66)2 322 2471 FAX: 2 322 2477
 Vietnam : IWAKI Pumps Vietnam Joint Venture Co., Ltd. TEL: (84)613 933456 FAX: 613 933399

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly.
 Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.